


Safety Pin Standard Bow Shackle

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Meets the W.L.L. requirements of EN 13889 from sizes 0.5 tonne to 25 tonne.
- Meets the W.L.L. requirements of US Fed Spec RR C 271.
- Supplied with an EC declaration of conformity.
- Safety factor 6:1.
- Hot dipped galvanised.
- Marked with manufacturers mark, size, ID mark, CE and W.L.L.

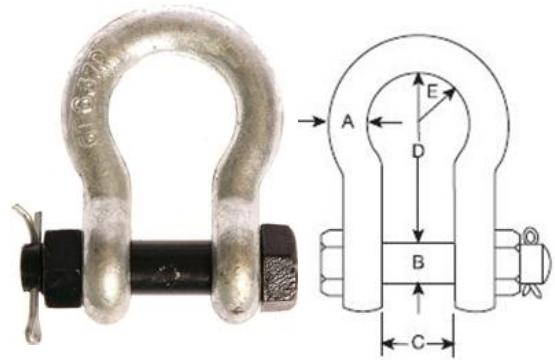

W.L.L	A	B	C	D	E	Weight
(tonnes)	(mm)	(mm)	(mm)	(mm)	(mm)	(kgs/100)
0.50	6.4	8.0	12.0	28.6	20	0.07
0.75	8.0	10.0	13.0	31.0	21	0.13
1.00	9.5	12.0	17.0	36.5	26	0.17
1.50	11.0	12.0	18.0	42.5	29	0.25
2.00	12.7	16.0	20.6	47.3	32	0.44
3.25	16.0	19.8	27.0	60.5	43	0.79
4.75	19.0	22.0	32.0	71.5	51	1.26
6.50	22.0	27.0	36.6	84.0	58	1.88
8.50	25.0	30.0	43.0	96.0	68	2.78
9.50	28.5	33.0	46.0	108.0	75	3.87
12.00	31.8	36.0	51.6	119.0	83	5.26
13.50	34.9	39.0	57.0	133.5	92	6.94
17.00	38.0	42.0	60.0	147.0	99	8.79
25.00	44.0	52.0	73.0	178.0	126	14.99
35.00	50.0	56.0	82.0	197.0	138	20.65
55.00	63.5	68.0	105.0	267.0	180	41.05
85.00	75.0	85.0	127.0	320.0	190	62.00
120.00	88.0	95.0	133.0	372.0	240	106.00